

MIRA ENVINET



MIRA – Gamma Dose Rate Monitoring System

MIRA is a highly versatile and very flexible gamma dose rate monitoring system. Due to its modular design, it can be configured and used in different ways and thus covers versatile applications. It facilitates not only a gamma probe but can be extended by means of internal and external options to various gamma monitoring stations. MIRA can be deployed in both fixed installation and mobile applications. Its special features are autonomous operation capability and a highly reliable wireless data communication design.

GAMMA DOSE RATE MONITORING SYSTEM

MIRA is the new generation of highly compact gamma dose rate monitoring systems, supporting a wide range of applications. MIRA offers versatile data communication capabilities and supports stationary or mobile applications, due to its autonomous power supply.

APPLICATIONS

- Ring monitoring systems around nuclear facilities
- Nationwide monitoring networks
- Area monitoring
- Laboratory and system monitoring
- Temporary measurement
- Transport monitoring
- Civil defense and disaster control

FEATURES

- Unlimited autonomous operation
- Wireless service interface Bluetooth
- Lightweight and extremely mobile
- Easy to install and deploy
- Rugged design (IP68 / IP65)
- Different communication options (LAN, GPRS, LTE, RADIO, RS485, RS232)
- Redundant data communication
- Integrated accuracy test
- Power supply or battery charging with standard cellphone power supply unit or by USB
- >10 years non-volatile storage of all readings
- Wide operation temperature range -40 °C to +60 °C
- Operation under harsh environmental conditions
- LAN interface is always included

ACCESSORIES

- Tripod
- Weather station
- Carrying case
- Battery charger
- Central radio communication unit
- Test set



Gamma Detector

- Single application
- LAN, RS232 or RS485
- USB or 5V power



Gamma Monitoring Station

- Remote application
- LTE, RADIO, DSL, SAT, TETRA
- Mains or solar power supply



Autonomous Monitoring Station

- Different applications
- LTE/GPRS or/and RADIO
- Solar power supply



Autonomous Mobile Monitoring Station

- Temporary deployment
- LTE/GPRS or/and RADIO
- Solar power supply



Gamma & Weather Monitoring Station

- Mobile and permanent use
- LTE/GPRS or/and RADIO
- Solar or mains power supply

DESCRIPTION

MIRA is a gamma dose rate detection system that uses two Geiger-Müller detectors to cover a wide measurement range from 10 nSv/h to 10 Sv/h calibrated for Ambient Dose Rate Equivalent H*(10). The technical design allows a wide range of applications, from standalone deployment right through to diverse and complex monitoring networks.

FUNCTIONS

- Gamma dose rate detection at three user-configurable time intervals
- Count rate detection at three user-configurable time intervals
- Temperature detection at two user-configurable time intervals
- Battery state of charge detection at two user-configurable time intervals
- Data integrity is guaranteed for the product life time.
- Data acquisition in real time
- Intrinsic background correction
- Temperature compensation of intrinsic background
- Local background correction
- Automatic switch-over between LD and HD
- Overload detection of HD detector
- Status supervision of detectors, battery and electronic
- Alarm management with two thresholds (spontaneous call)
- Notification of threshold exceeding or status change




MIRA Tablet with MIRA App

BENEFITS

- Low cost investment
 - No infrastructure necessary due to battery or solar power and wireless data communication
 - Cost-effective and easy to install
- Low cost of operation
 - Minimal service expenses
 - Autonomous operation
 - Remote configuration and control capability
 - Maintenance free operation
- Extensive product range supports versatile applications

DATA ANALYSIS

All applications - from a single detector to a nationwide monitoring network with hundreds of monitoring stations - are supported by ENVINET's monitoring center software NMC. Through NMC all MIRAs in a monitoring network can be managed, configured and supervised. NMC polls the measured data continuously and archives it; furthermore it offers versatile data analysis and presentation capabilities. In addition, it provides several alarm management functions.

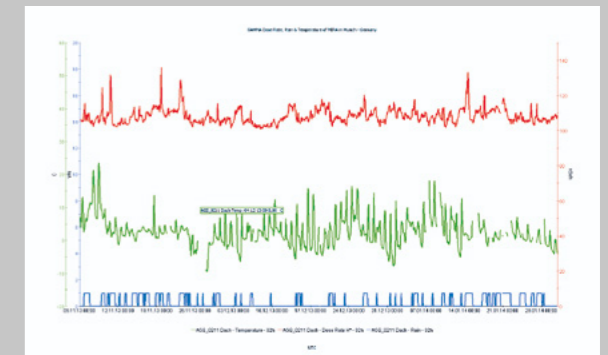



ENVINET GmbH
Hans-Pinsel-Str. 4
85540 Haar/ Munich
Germany
+49 (89) 45 66 57-0
info@envinet.com
www.envinet.com